

K-2030-10-S 2- and 3-arm universal puller set with narrow puller hooks



DETAIL IMAGE



DESCRIPTION

The 2- and 3-jaw universal puller set with narrow pulling hooks (set from the 2030 series) is used to pull bearings, gears, discs etc. from narrow and hard-to-reach spaces in trade, industry and workshops. The 2030 series impresses with its versatile design options. The kit enables the assembly of 8 different puller models by combining Pulling hooks and extensions.

RANGE OF APPLICATION

For extracting bearings, gears, discs etc. for narrow and hard-to-reach spaces in trade, industry and workshops.

BENEFIT

- Application-orientated compilation for universal use
- Storage in the box makes it easy to keep track of the completeness of the set
- Easily adjustable and configurable for a wide range of applications depending on the existing extraction situation
- The 2- or 3-arm design means you are always flexible in use
- Extensions enable deep-seated components to be removed

OPERATION

- Attach the Pulling hook to the part to be extracted from the outside
- Slide the claws under the component
- Use a spanner to fasten the hooks
- Pull the spindle manually under pressure to fix it
- Use a ratchet or combination spanner to move the hexagon on the spindle head until the component is released



MASTER DATA

GTIN [EAN]	4021176306181
Country of origin	DE
Case material	Tool steel
Series	K-2030-10-S
Net weight [kg]	8,92 kg
Package contents	1 set
Packaging Act	PAP 21

SPARE PARTS


- 20-10-S_2-jaw universal puller with narrow pulling hooks
- 614250_Mechanical pressure spindle
- 30-10-T_Traverse
- 1-191-S_Narrow Pulling hooks (set)
- 1-251-S_Narrow Pulling hooks (set)

2- and 3-arm universal puller set with narrow puller hooks

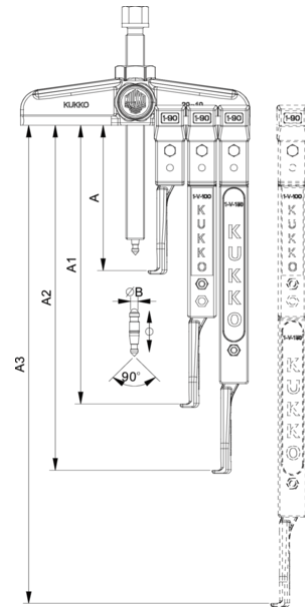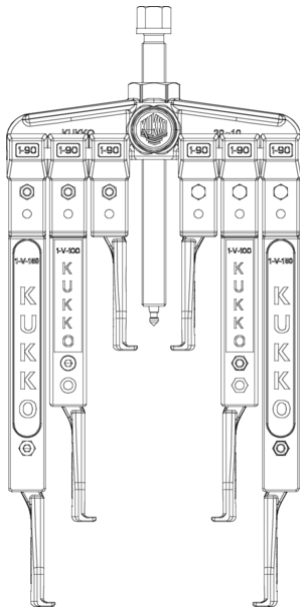

Abbreviation	Attribut	Wert
X	Total width [mm]	442 mm
Y	Total depth [mm]	357 mm
Z	Total height [mm]	151 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	130 mm
Emin	Span inside pull-out (min.) [mm]	70 mm
Emax	Span inside pull-out (max.) [mm]	180 mm
Tmax	Max. torque [Nm]	40 Nm
Fmax	Max. tractive force [t]	3 t
Fmax	Max. tensile force [kN]	30 kN

Abbreviation	Attribut	Wert
X	Total width [mm]	442 mm
Y	Total depth [mm]	357 mm
Z	Total height [mm]	151 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	130 mm
Emin	Span inside pull-out (min.) [mm]	70 mm
Emax	Span inside pull-out (max.) [mm]	180 mm
Tmax	Max. torque [Nm]	40 Nm
Fmax	Max. tractive force [t]	3 t
Fmax	Max. tensile force [kN]	30 kN

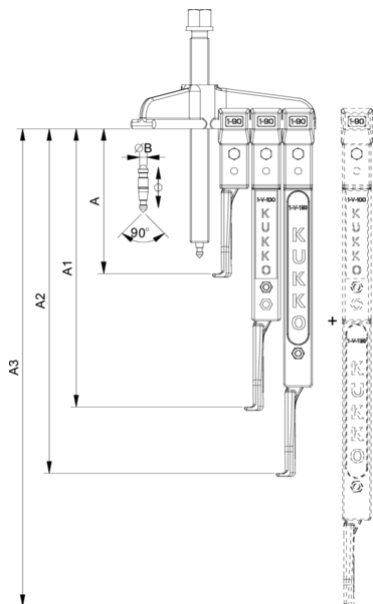

Abbreviation	Attribut	Wert
X	Total width [mm]	442 mm
Y	Total depth [mm]	357 mm
Z	Total height [mm]	151 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	0 mm
Cmax	Span outside pull-off (max.) [mm]	130 mm
Emin	Span inside pull-out (min.) [mm]	70 mm
Emax	Span inside pull-out (max.) [mm]	180 mm
Tmax	Max. torque [Nm]	40 Nm
Fmax	Max. tractive force [t]	3 t
Fmax	Max. tensile force [kN]	30 kN